

Remarks

This Preliminary Amendment cancels, without prejudice, claims 1-13 in the underlying PCT Application No. PCT/DE03/00563 and adds new claims 14-26.

The new claims, inter alia, conform the claims to United States Patent and Trademark Office rules and do not add any new matter to the application.

In accordance with 37 C.F.R. § 1.125(b), the Substitute Specification (including Abstract) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to United States Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. §§ 1.121(b)(3)(ii) and 1.125(c), a Marked-Up Version of the Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) are respectfully requested.

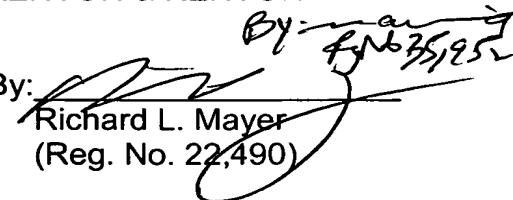
The underlying PCT Application No. PCT/DE03/00563 includes an International Search Report, dated November 2, 2004, a copy of which is included. The Search Report includes a list of documents that were considered by the Examiner in the underlying PCT application.

Applicants assert that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

Dated: 2/16/05

By: 
Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

CONTROL UNIT

Background InformationField Of The Invention

The present invention is directed to a control unit including a processor and at least one inertial sensor in a housing ~~according to the definition of the species in the independent patent claim.~~

5

Advantages of theSummary Of The Invention

The control unit according to the present invention ~~having the features of the independent claim~~ has the advantage that the digital transmission between the processor and the inertial sensor in the control unit is fail-safe with respect to
10 electromagnetic interferences, shunts, and humidity. This advantage is ~~essential~~important at high signal resolution in particular. This advantage has an ~~essential~~important effect in the ever decreasing internal control unit voltage levels which are contingent on the ever decreasing processor levels. Moreover, the digital transmission enables easy identification of an erroneous transmission. This makes
15 direct and measured value-independent analysis of the transmitted sensor information possible. An inertial sensor is understood to be an acceleration sensor and/or a yaw rate sensor.

~~Advantageous improvements on the control unit recited in the independent patent claim are made possible due to the measures and refinements listed in the dependent claims.~~

It is particularly advantageous that the data transmission is achieved via a serial synchronous interface. Multiple sensors in the control unit may be connected to this
25 serial interface. The use of a synchronous interface enables easier processing of the signals.

Furthermore, it is an advantage that transmission of at least one error bit and at least one status bit is provided. The error bit enables the detection and identification of
30 transmission errors in order to implement adequate measures if needed. Such measures may be an error correction from the received data or switching of the function state of the system or the control unit, e.g., faulty operation, error message output, warning lamp switch-on, or re-requesting the transmitted data, preferably in a

data message, i.e., in a frame. The status bit, for example, enables the processor to recognize the operating state of the sensor, e.g., running sensor test, offset regulation mode, or initializing phase. More than one error bit and/or status bit may be used.

5

Furthermore, it is an advantage that the data transmission is designed to be bidirectional. This makes it possible for the sensor to transmit measuring data to the processor and for the processor in turn to put the sensor into a certain state or to retrieve certain data therefrom. This is not necessarily measuring data only, but also internal information about the sensor, such as a self testing result or the current operating state in which the sensor is operating (offset regulation mode, running self test, initializing phase, etc.).

10

Four lines are ~~proposed~~provided for the data transmission, three lines thereof being connected to each sensor, situated in the control unit and taking part in this data transmission, and the fourth line being provided for each individual sensor. This fourth line provides for the activation of the data transmission with the respective sensor. If three sensors are connected to the data transmission according to the present invention, three such lines, which run from the processor to these three sensors, are provided in order to activate the individual sensors at the appropriate points in time. Moreover, there are the additional three lines which are provided for the actual data transmission. This is generally referred to as serial peripheral interface (SPI) which has a clockline, an input line, an output line, and the sensor select line.

20

25

It is also advantageous that the at least one inertial sensor may have a multi-channel design. Multi-channel operation means that more than one measuring mode is possible using one sensor.

Moreover, it is advantageous that the data transmission is configured for triggering the switch-over from one operating state to another operating state of the at least one inertial sensor.

30

Finally, it is also advantageous that the control unit according to the present invention is usable in a restraining means and/or a vehicle dynamics control system and/or a navigation system and/or a cross-system sensor box.

35

Drawing

Exemplary embodiments of the present invention are illustrated in the drawing and explained in greater detail in the following description.

5 Brief Description Of The Drawings

Figure 1 shows a block diagram of the control unit according to the present invention.

10 Figure 2a shows an information transmission from the processor to the inertial sensor.

Figure 2b shows an information transmission from the sensor to the processor, and.

15 Figure 3 shows a sensor data transmission from the sensor to the processor.

Detailed Description of the Exemplary Embodiments

Inertial sensors, which are currently used in a control unit for restraint systems, transmit their measuring signal analog to an analog input of a microcontroller in the control unit. The microcontroller has an analog-to-digital converter. Since acceleration sensors and yaw rate sensors are understood to be inertial sensors, acceleration sensor signals or yaw rate sensor signals are represented by analog voltage time characteristics. The instantaneous value of the deviation from a quiescent value, typically half the supply voltage of the inertial sensor, represents the current measured value. The assignment takes place via sensor-specific sensitivities which are typically indicated in millivolts per acceleration or millivolts per angle change per time. Further signal processing, which started with the analog-to-digital conversion, subsequently takes place in the microcontroller.

30 The susceptibility of the transmitted analog signal represents a substantial disadvantage in this technology. Electromagnetic interferences, shunts due to humidity, and other interferences may alter the sensor output signal to a degree critical for the restraint system. This may result in the simulation of accelerations or yaw rates, which in turn may result in the danger of non-functioning or restricted

functioning or false triggering. This disadvantage is all the more a factor as the demands on signal resolution increase and the internal control unit voltage levels decrease. The fact that errors in an analog transmission are identifiable only to a very limited degree represents an additional disadvantage. These above-mentioned
5 interferences alter the sensor output signal in a way which is only ascertainable via signal plausibility checks, but not via direct and measured value-independent analysis of the transmitted sensor output information.

The present invention ~~proposes~~provides digital transmission between the inertial
10 sensor and the processor in the control unit. A serial synchronous interface is preferably used for this purpose, the digital signals exhibiting higher transmission reliability. The transmitted information is extremely robust with respect to interference-related voltage level changes, since the voltage ranges, which are assigned to a logic one or zero, are relatively great, typically greater than or equal to
15 80% of the voltage level or ~~smaller~~less than or equal to 20% of the voltage level. If, however, transmission errors occur despite the increased robustness, these errors could be detected in all likelihood. With regard to the respective processor request, non-defined digital words may be easily identified by the system. Moreover, transmission of status bits and error bits, as well as transmission of whole data
20 words, which contain a detailed description of the sensor state, is provided and possible without relevant additional technical complexity. Constant status checks enable the cyclical and/or permanent recognizability of systematic transmission errors.

25 It is also an advantage that in addition to the transmission of information from the inertial sensor to the processor, instructions are also transmitted in the opposite direction via the same interface. This makes it possible to establish control instructions, such as a sensor test, or on- and off-switching of a sensor-internal offset regulation, or switching from one operating state to another, without additional
30 system-related expense for hardware and without additionally necessary sensor bits.

The easily possible designation of the transmitted digital words using status bits is a particular advantage. While the sensor self-test is activated, a corresponding test status flag makes it possible for the test-contingent sensor output signal to be known

to the system as such, thereby making a reliable system check possible. The utilization of the present invention is also possible and sensible in other automotive applications in which inertial sensors are used in connection with processors. Examples of these applications are the vehicle dynamics control system, a sensor
5 box or sensor cluster, or the vehicle navigation system.

The present invention relates in particular to a restraint system control unit and inertial sensors used therein, i.e., acceleration sensors and/or yaw rate sensors which may have a one-channel or a multi-channel design. The sensor signals are
10 provided in a sensor ASIC (application-specific integrated circuit) as digital values. This means that the sensor is designed as an intelligent sensor. In addition to the actual sensing element, such an intelligent sensor also has a measuring signal amplifier, an analog-to-digital converter, and other signal conditioning modules. Finally, an interface module is also present in the sensor ASIC to ensure digital
15 transmission to the processor.

In particular, an interface known as a serial peripheral interface is used as the communication interface between the sensor and the processor, the processor functioning as the master and the inertial sensors as the slaves. The SPI bus is
20 made up of four lines: first the SPI clock (SCK), i.e., a clockline, followed by the master-out slave-in (MOSI) line and the master-in slave-out (MISO) line. These two lines are used for the actual data transmission. The fourth line is known as the chip select line (CS). It establishes a separate link between each individual inertial sensor and the processor, i.e., there are as many CS lines as there are slaves. The other
25 three lines, the SCK line, the MOSI line, and the MISO line, are only present once and all sensors are connected to these three lines. In a non-activated chip select, MISO is a high-resistance line, i.e., in a state known as "tristate." The SPI supports combined write-read cycles and uses a uniform SPI frame for writing and reading. For this reason, the processor transmits the data according to the SPI instruction
30 starting with the MSB (most significant bit). After receipt of the SPI instruction, the inertial sensor transmits the corresponding data to the processor, likewise starting with the MSB.

An SPI frame is used here which transmits a 7-bit instruction and 8-bit data in a 16-bit frame during the active chip select phase. One bit is provided for the required response time between the instruction and data word.

- 5 An additional SPI frame is used which allows transmission of a 12-bit data word, which contains the acceleration or yaw rate information, within the 16-bit frame. The length of the instruction is then limited to 3 bits, one bit being provided for the response time.
- 10 Figure 1 shows a block diagram of the control unit according to the present invention. A processor 2 and, as an example, two inertial sensors 3 and 4 are situated in a housing 1. Sensors 3 and 4 are each connected to processor 2 via four lines. Three lines, i.e., lines 5 through 7, are the same for both sensors 3 and 4, lines 8 and 9 being assigned only to the individual sensor. Line 9 is assigned to sensor 3 and line 8 is assigned to sensor 2-4. Lines 8 and 9 act as the above-mentioned chip select lines, i.e., they activate the data transmission to the respective sensor. Line 5 is the clockline, while line 6 enables data transmission from processor 2 to sensors 3 and 4 and line 7 enables data transmission of sensors 3 and 4 to processor 2. It is possible for more than the two sensors 3 and 4 to be connected to the processor via these lines, the additional sensors having their own chip select lines. Moreover, it is possible for only a single sensor to be connected to processor 2. Other components of the control unit are not shown here. These may include, for example, interface modules for communication outside of the control unit, an ignition circuit control and other modules such as a plausibility switch. Other modules may also be connected to these SPI lines in addition to sensors 3 and 4.

Figure 2a shows the data messages which are carried out in a data transmission from the processor to the respective sensor, i.e., the frame for the standard write access. Signal 10 is the chip select signal and provides, with the low level, for communication between the processor and the respective sensor, i.e., data may be transmitted via lines 6 and 7. The 7-bit write instruction, e.g., an instruction for switching on the offset regulation, and 8-bit supplementary data, e.g., for assigning the instruction to a certain measuring channel or for the switching information on/off associated with the instruction, are transmitted to the sensors in fields 13 and 14. In

row 12, the signal is transmitted from the sensor to processor 2. In return, 8-bit data including status and error information is transmitted to processor 2 in field 15. Field 16 is not used here.

- 5 Figure 2b shows the frame for standard read access. Rows 10, 11, and 12 are shown again. The low level in row 10 indicates that the transmission between the sensor and the processor is taking place. The 7-bit read instruction, e.g., the instruction for reading out the operating state regarding the offset regulation, is transmitted in row 11 in field 17. Field 18 is not used here. In row 12, the signal is transmitted from the sensor to the processor. In return, 8-bit data including status and error information is transmitted to processor 2 in field 15. Field 16 does not contain any useful information in the present case. In return, 8-bit data including status and error information is re-transmitted to processor 2 in field 19. Field 20 does not contain any useful information in the present case.

- 15 Figure 3 shows the data transmission from the sensor to the processor for transmitting a 12-bit data word which contains the acceleration and yaw rate information, i.e., this 12-bit data word is transmitted in row 12 in field 24, while the corresponding read instruction is transmitted to the sensor in field 21 of row 11. The information in field 22 of this row is not processed by the sensor in the present case, i.e., it is irrelevant. Field 23 of row 12 contains status and error information transmitted to processor 2.

Abstract Of The Disclosure

Described is a control unit in which, at least one inertial sensor and a processor are accommodated in a housing. The data transmission between the inertial sensor and the control unit is performed digitally. The transmission may be provided with error bits or status bits. The data transmission is configured to be bidirectional in particular. Four lines are provided between the control unit and the sensor, one of the lines being used for selecting the sensor.

(Figure 1)